

❖ **SP-5000-USB**
5-megapixel CMOS global shutter

USBTM
VISION



- **Large format 5 MP CMOS imager (global shutter)**
- **Up to 61.98 fps at full resolution**
- **5.0 μm square pixels in a 5:4 aspect ratio**
- **Monochrome or Bayer color models**
- **60 dB linear dynamic range with up to 100 dB piecewise HDR modes (monochrome only)**
- **Analog front-end gain control for reduced noise in low light images**
- **On-chip 4-channel analog gain for individual R, G1, G2, + B control (color models)**
- **Exposure control from 10 μs (1/100,000) to 8 seconds in 1 μs steps**
- **ROI modes for flexible readout, windowing, or increasing frame rate**
- **Vertical and horizontal binning on monochrome model**
- **8/10-bit digital output over USB3 Vision interface**
- **C-mount lens mount**
- **Automatic Level Control (ALC) for dynamic lighting conditions**
- **Programmable P-iris lens control or 3-axis control for operation of motorized lenses, pan/tilt heads, or other analog accessories**




Specifications for SP-5000-USB

Spark Series

Specifications	SP-5000-USB
Sensor	1" CMOS global shutter (Lince5M250)
Pixel clock	48 MHz
Frame rate, full frame	67.94 frames/sec.
Active area	12.8 mm (h) x 10.2 mm (v), 16.39 mm diagonal
Cell size	5.0 μm (h) x 5.0 μm (v)
Active pixels	2560 (h) x 2048 (v)
Read-out modes	Full ROI (mono) 2560 (h) x 2048 (v) up to 67.94 fps 1 line to full frame height in 1-line steps, with X offset and width in 16-pixel steps 2 lines to full-frame height in 2-line steps, with X offset and width in 16-pixel steps
Binning	1x2, 2x1, 2x2 (monochrome only)
EMVA 1288 Parameters	10-bit output format
Absolute sensitivity (mono)	23.50 p (λ = 525 nm)
Absolute sensitivity (color)	36.08 p (λ = 525 nm)
Maximum SNR (mono)	41.48 dB
Maximum SNR (color)	38.00 dB
Traditional SNR*	mono >55 dB (0 dB gain) color >53 dB (0 dB gain, green)
Video signal output	mono 8/10-bit monochrome color 8/10-bit raw Bayer
Auto-iris lens video output	0.7Vp-p, with 0.3V horiz. sync
Gain	Manual/automatic 0 dB to +24 dB
White balance (SP-5000C)	Manual, one-push auto, or continuous (3000K to 9000K)
Gamma	0.45-1.0 (8 steps) or 256-point LUT
Synchronization	Internal
Trigger input	Opto In, TTL In, Pulse Generators (2), Software, NAND 0, NAND 1
Trigger modes	EPS, PIV, Trigger Width, Timed RCT (with ALC), Sequence
Electronic shutter	Timed exposure 10 μs to 8 sec in 1 μs steps Auto shutter 1/68 to 1/100000 sec.
Auto Level Control (ALC)	Shutter range from 1/68 to 1/100000, gain range from 0 dB to +24 dB, auto iris control. Tracking speeds and max values adjustable.
High Dynamic Range function	4 built-in HDR slopes. Selectable up to ~100 dB.
Pre-processing functions	Flat field correction, color shading correction (SP-5000C), blemish compensation (512 pixels)
3-axis control	Programmable control of motorized lenses, pan/tilt heads, and other analog accessories
Operating temperature	-45°C to +70°C†
Storage temperature	-45°C to +70°C
Humidity	20 – 80% non-condensing
Vibration	10 G (20Hz to 200Hz XYZ)
Shock	80 G
Regulations	CE (EN61000-6-2, EN61000-6-3), FCC Part 15 class B, RoHS/WEEE
Power	12V to 24V DC ± 10%. 4.32W typical (full frame @ 12V)
Lens mount	C-mount (fixed or adjustable)
Dimensions (H x W x L)	62 mm x 62 mm x 55.5 mm
Weight	255 g


Ordering Information	
SP-5000M-USB	Monochrome camera with two-channel USB3 Vision
SP-5000C-USB	Color camera with two-channel USB3 Vision

*Traditional SNR is based on random noise in a single frame, where EMVA SNR measurements consider more comprehensive noise sources and variance over time. For a more complete description, see the manual.
†Reduced performance may occur when operating outside the standard range of -10°C to +50°C
Note: add -CX to model number for adjustable C-mount

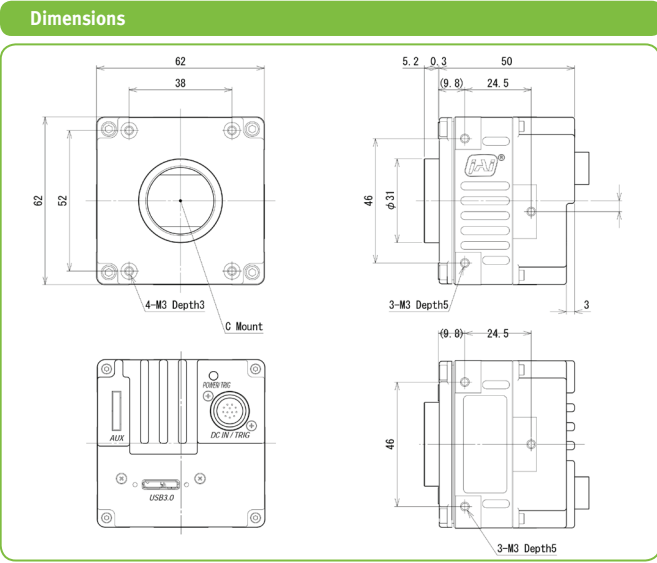

Connector pin-out

DC In / Trigger		USB 3.0 Interface																																																																							
<p>HIROSE HR10A-10R-12PB-01</p> <table border="1"> <thead> <tr> <th>Pin</th> <th>Signal</th> </tr> </thead> <tbody> <tr><td>1</td><td>GND</td></tr> <tr><td>2</td><td>+12V to +24V DC input</td></tr> <tr><td>3</td><td>GND</td></tr> <tr><td>4</td><td>NC</td></tr> <tr><td>5</td><td>Opto In-</td></tr> <tr><td>6</td><td>Opto In+</td></tr> <tr><td>7</td><td>Opto Out-</td></tr> <tr><td>8</td><td>Opto Out+</td></tr> <tr><td>9</td><td>TTL out 1</td></tr> <tr><td>10</td><td>TTL in 1</td></tr> <tr><td>11</td><td>+12V to +24V DC input</td></tr> <tr><td>12</td><td>GND</td></tr> </tbody> </table>		Pin	Signal	1	GND	2	+12V to +24V DC input	3	GND	4	NC	5	Opto In-	6	Opto In+	7	Opto Out-	8	Opto Out+	9	TTL out 1	10	TTL in 1	11	+12V to +24V DC input	12	GND	<p>Micro B type - ZX3600-B-10P or equiv.</p> <table border="1"> <thead> <tr> <th>No</th> <th>I/O</th> <th>Name</th> <th>Note</th> </tr> </thead> <tbody> <tr><td>1</td><td>I</td><td>VBUS IN</td><td>Power (VBUS)¹</td></tr> <tr><td>2</td><td>I/O</td><td>DM</td><td>USB2.0 Differential pair (-)²</td></tr> <tr><td>3</td><td>I/O</td><td>DP</td><td>USB2.0 Differential pair (+)</td></tr> <tr><td>4</td><td></td><td>OTG ID</td><td>USB OTG ID for identifying lines</td></tr> <tr><td>5</td><td></td><td>GND</td><td>GND</td></tr> <tr><td>6</td><td>O</td><td>FX3 SSTXM</td><td>USB3.0 Signal Transmission line (-)</td></tr> <tr><td>7</td><td>O</td><td>FX3 SSTXP</td><td>USB3.0 Signal Transmission line (+)</td></tr> <tr><td>8</td><td></td><td>GND</td><td>GND</td></tr> <tr><td>9</td><td>I</td><td>FX3 SSRXP</td><td>USB3.0 Signal Receiving line (-)</td></tr> <tr><td>10</td><td>I</td><td>FX3 SSRXM</td><td>USB3.0 Signal Receiving line (+)</td></tr> </tbody> </table> <p>¹ SP-5000-USB does not accept power over USB ² Does not work with USB 2.0</p>		No	I/O	Name	Note	1	I	VBUS IN	Power (VBUS) ¹	2	I/O	DM	USB2.0 Differential pair (-) ²	3	I/O	DP	USB2.0 Differential pair (+)	4		OTG ID	USB OTG ID for identifying lines	5		GND	GND	6	O	FX3 SSTXM	USB3.0 Signal Transmission line (-)	7	O	FX3 SSTXP	USB3.0 Signal Transmission line (+)	8		GND	GND	9	I	FX3 SSRXP	USB3.0 Signal Receiving line (-)	10	I	FX3 SSRXM	USB3.0 Signal Receiving line (+)
Pin	Signal																																																																								
1	GND																																																																								
2	+12V to +24V DC input																																																																								
3	GND																																																																								
4	NC																																																																								
5	Opto In-																																																																								
6	Opto In+																																																																								
7	Opto Out-																																																																								
8	Opto Out+																																																																								
9	TTL out 1																																																																								
10	TTL in 1																																																																								
11	+12V to +24V DC input																																																																								
12	GND																																																																								
No	I/O	Name	Note																																																																						
1	I	VBUS IN	Power (VBUS) ¹																																																																						
2	I/O	DM	USB2.0 Differential pair (-) ²																																																																						
3	I/O	DP	USB2.0 Differential pair (+)																																																																						
4		OTG ID	USB OTG ID for identifying lines																																																																						
5		GND	GND																																																																						
6	O	FX3 SSTXM	USB3.0 Signal Transmission line (-)																																																																						
7	O	FX3 SSTXP	USB3.0 Signal Transmission line (+)																																																																						
8		GND	GND																																																																						
9	I	FX3 SSRXP	USB3.0 Signal Receiving line (-)																																																																						
10	I	FX3 SSRXM	USB3.0 Signal Receiving line (+)																																																																						

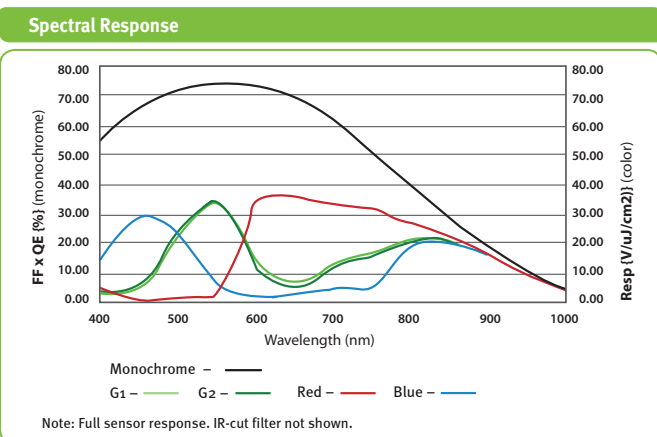

Europe, Middle East & Africa Phone +45 4457 8888 Fax +45 4491 3252	Asia Pacific Phone +81 45 440 0154 Fax +81 45 440 0166	Americas Phone (Toll-Free) 1 800 445 5444 Phone +1 408 383 0300
---	---	--

Visit our web site on www.jai.com

See the possibilities

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI/JS cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notification.