


T3-0614

1/2"
6mm
F1.4
3MP

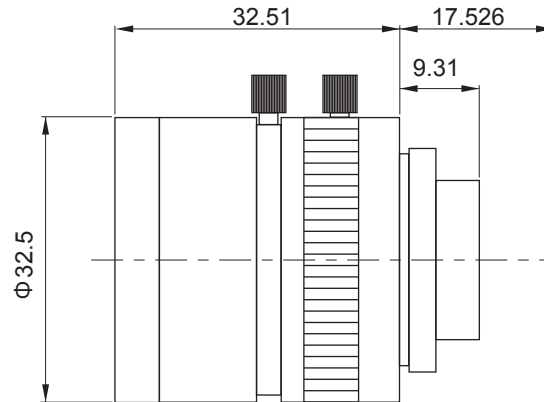


Unit: mm

Image Format	1/2 inch (6.4 x 4.8mm, Φ8mm)	
Focal Length	6mm	
Relative Aperture	F=1:1.4	
Iris Range	F1.4 to 16	
Angular Field of View	Horizontal	56.6° (1/2inch)
	Vertical	43.8° (1/2inch)
Resolution	3MP	
TV Distortion	-0.34% (1/2inch)	
M.O.D.(Minimum Object Distance)	0.1m	
Back Focal Length	8.89mm	
Flange Back Length	17.526mm	
Operation	Focus	Manual with lock screw
	Iris	Manual with lock screw
Lens Mount	C-mount	
Filter Screw	M30.5 P=0.5	
Dimensions	Φ 32.5 x 32.5 mm	
Weight	100 g	
Operating Temperature	-20 to +60°C	

T3-0918

2/3" 9mm F1.8 3MP

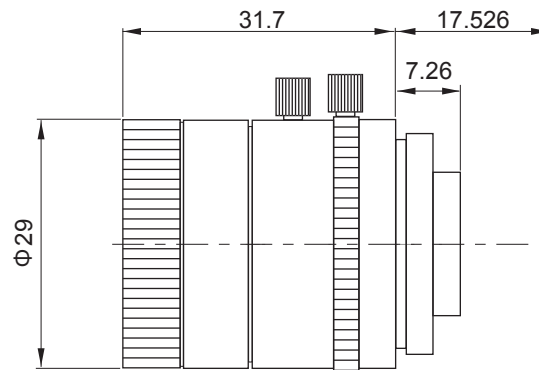


Unit: mm

Image Format	2/3 inch (8.8 x 6.6mm, Φ 11mm)	
Focal Length	9mm	
Relative Aperture	F=1:1.8	
Iris Range	F1.8 to 16	
Angular Field of View	Horizontal	51.2°(2/3inch)
	Vertical	39.5°(2/3inch)
Resolution	3MP	
TV Distortion	-0.17% (2/3inch)	
M.O.D.(Minimum Object Distance)	0.1m	
Back Focal Length	10.87mm	
Flange Back Length	17.526mm	
Operation	Focus	Manual with lock screw
	Iris	Manual with lock screw
Lens Mount	C-mount	
Filter Screw	M27 P=0.5	
Dimensions	Φ 29 x 31.7 mm	
Weight	65 g	
Operating Temperature	-20 to +60°C	

T3-1220

2/3"
12mm
F2.0
3MP

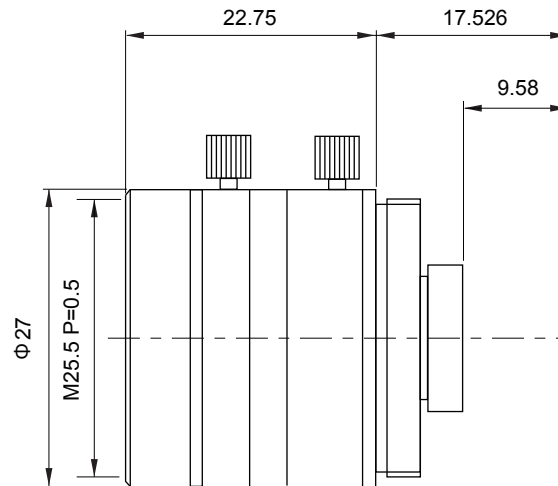


Unit: mm

Image Format	2/3 inch (8.8 x 6.6mm, $\Phi 11$ mm)	
Focal Length	12mm	
Relative Aperture	F=1:2.0	
Iris Range	F2.0 to 16	
Angular Field of View	Horizontal	40.2° (2/3inch)
	Vertical	30.7° (2/3inch)
Resolution	3MP	
TV Distortion	-0.14% (2/3inch)	
M.O.D.(Minimum Object Distance)	0.1m	
Back Focal Length	9.73mm	
Flange Back Length	17.526mm	
Operation	Focus	Manual with lock screw
	Iris	Manual with lock screw
Lens Mount	C-mount	
Filter Screw	M25.5 P=0.5	
Dimensions	$\Phi 27 \times 22.75$ mm	
Weight	32 g	
Operating Temperature	-20 to +60°C	

T3-1618

2/3"
16mm
F1.8
3MP

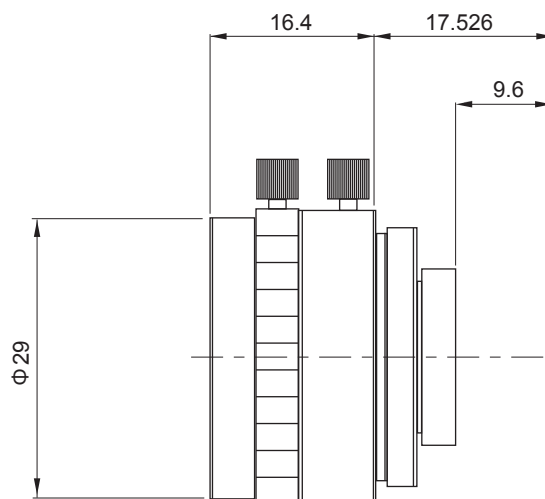


Unit: mm

Image Format	2/3 inch (8.8 x 6.6mm, Φ 11mm)	
Focal Length	16mm	
Relative Aperture	F=1:1.8	
Iris Range	F1.8 to 16	(2/3inch)
Angular Field of View	Horizontal	30.7° (2/3inch)
	Vertical	23.3°
Resolution	3MP	
TV Distortion	0.68%	(2/3inch)
M.O.D.(Minimum Object Distance)	0.2m * With using extention ring 1mm, M.O.D is 0.1m	
Back Focal Length	10.38mm	
Flange Back Length	17.526mm	
Operation	Focus	Manual with lock screw
	Iris	Manual with lock screw
Lens Mount	C-mount	
Filter Screw	M25.5 P=0.5	
Dimensions	Φ29 x 16.4 mm	
Weight	32 g	
Operating Temperature	-20 to +60°C	

T3-2518

2/3"
25mm
F1.8
3MP

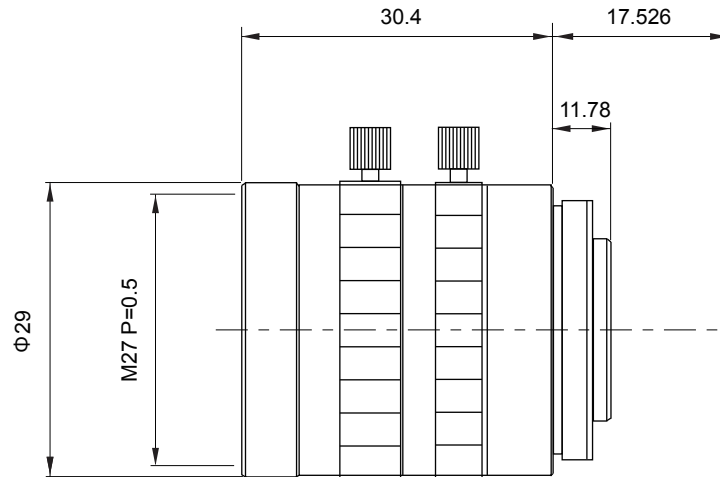


Unit: mm

Image Format	2/3 inch (8.8 x 6.6mm, Φ 11mm)	
Focal Length	25mm	
Relative Aperture	F=1:1.8	
Iris Range	F1.8 to 16	
Angular Field of View	Horizontal	19.5° (2/3inch)
	Vertical	14.7° (2/3inch)
Resolution	3MP	
TV Distortion	0.05% (2/3inch)	
M.O.D.(Minimum Object Distance)	0.15m * With using extention ring 5mm, M.O.D is 0.1m.	
Back Focal Length	12.7mm	
Flange Back Length	17.526mm	
Operation	Focus	Manual with lock screw
	Iris	Manual with lock screw
Lens Mount	C-mount	
Filter Screw	M27 P=0.5	
Dimensions	Φ 29 x 30.4 mm	
Weight	55g	
Operating Temperature	-20 to +60°C	

T3-3518

2/3"
35mm
F1.8
3MP

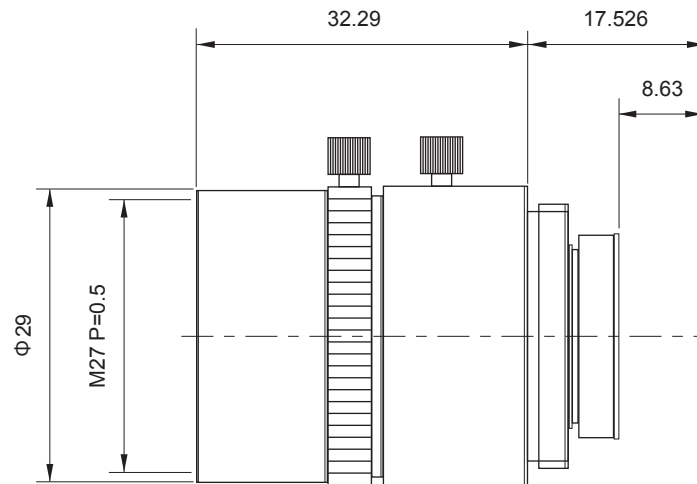


Unit: mm

Image Format	2/3 inch (8.8 x 6.6mm, Φ 11mm)	
Focal Length	35mm	
Relative Aperture	F=1:1.8	
Iris Range	F1.8 to 16	
Angular Field of View	Horizontal	14.4° (2/3inch)
	Vertical	10.8° (2/3inch)
Resolution	3MP	
TV Distortion	0.30% (2/3inch)	
M.O.D.(Minimum Object Distance)	0.5m * With using extention ring 10mm, M.O.D is 0.1m	
Back Focal Length	9.44mm	
Flange Back Length	17.526mm	
Operation	Focus	Manual with lock screw
	Iris	Manual with lock screw
Lens Mount	C-mount	
Filter Screw	M27 P=0.5	
Dimensions	Φ 29 x 32.9 mm	
Weight	64g	
Operating Temperature	-20 to +60°C	

T3-7524

2/3"
75mm
F2.4
3MP

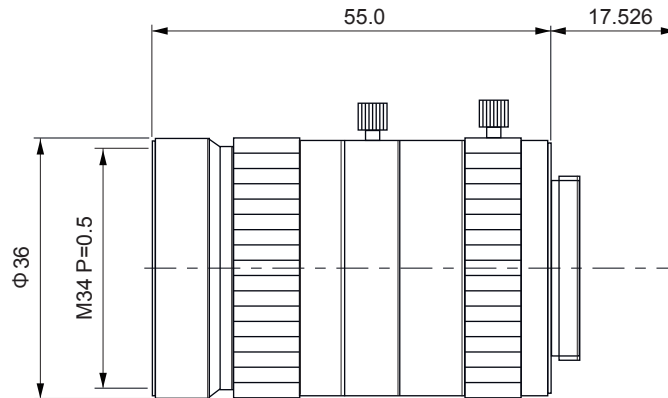

Unit: mm

Image Format	2/3 inch (8.8 x 6.6mm, $\Phi 11$ mm)	
Focal Length	75mm	
Relative Aperture	F=1:2.4	
Iris Range	F2.4 to 16	
Angular Field of View	Horizontal	6.7° (2/3inch)
	Vertical	5.0° (2/3inch)
Resolution	3MP	
TV Distortion	0.22% (2/3inch)	
M.O.D.(Minimum Object Distance)	1.0m * With using extention ring 55mm, the WD is 0.1m	
Back Focal Length	16.23mm	
Flange Back Length	17.526mm	
Operation	Focus	Manual with lock screw
	Iris	Manual with lock screw
Lens Mount	C-mount	
Filter Screw	M34 P=0.5	
Dimensions	$\Phi 36$ x 55 mm	
Weight	141g	
Operating Temperature	-20 to +60°C	