




Products Features

- ▶ Using special diffuser.
- ▶ Dome structure.
- ▶ Suitable for the application of uneven or reflective surface.

Model Description

SBS-DL-XXXXX-X

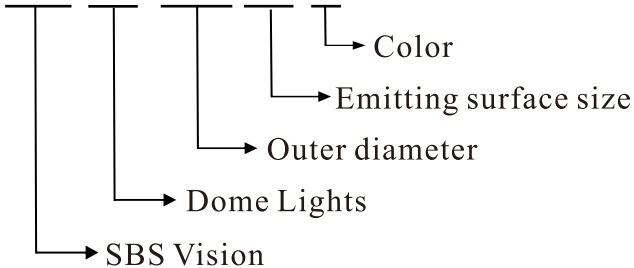


Applications the light be used for

- Uneven and reflective surface defects inspection.
- Characters inspection of IC surface.
- Damage inspection of condenser.
- QR code inspection of can.
- Glass instrument panel inspection.
- IC defects inspection of PCB board.


Customization

- Dimensions
- Power
- Color
- Cable length
- Connector
- Mounting

Structure

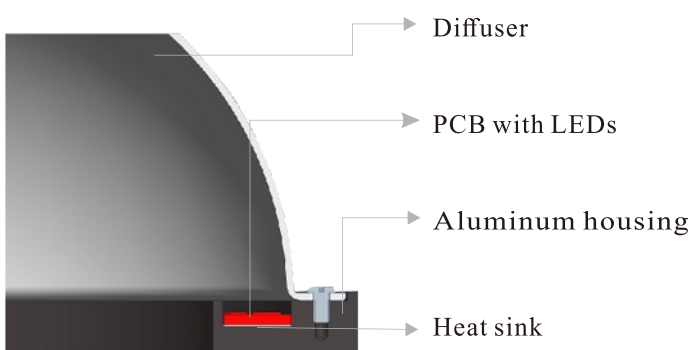

Components

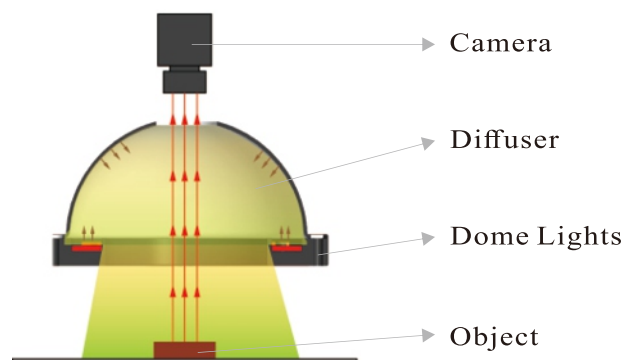

Parameter

| Item | Model | Power consumpition Red Color | Power consumpition (W,B,G) | Option | Extension cable | Recommended Controller |
|------|-------------|------------------------------|----------------------------|----------|-----------------|---|
| 1 | SBS-DL70-X | 24V/3.60W | 24V/7.20W | Diffuser | 1m/3m/5m | SBS-AC24XX-X (Analog controller) SBS-DC24XX-X (Digital controller) SBS-ODC48XX-X (Strobe controller) |
| 2 | SBS-DL114-X | 24V/7.20W | 24V/7.20W | Diffuser | 1m/3m/5m | |
| 3 | SBS-DL120-X | 24V/7.20W | 24V/10.80W | Diffuser | 1m/3m/5m | |
| 4 | SBS-DL175-X | 24V/7.20W | 24V/10.80W | Diffuser | 1m/3m/5m | |
| 5 | SBS-DL198-X | 24V/10.80W | 24V/14.40W | Diffuser | 1m/3m/5m | |
| 6 | SBS-DL260-X | 24V/10.80W | 24V/18.00W | Diffuser | 1m/3m/5m | |

Dimensions(mm)

